

Single Phase String Inverter

SUN- 1.5 / 2.2 / 2.7 / 3 / 3.3 / 3.6 / 4 K-G03



1 MPP tracker, Max. efficiency up to 97.5%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)



Low start-up voltage of 80V

Deye

Stock Code: 605117.SH

Model	SUN-1.5K-G03	SUN-2.2K-G03	SUN-2.7K-G03	SUN-3K-G03	SUN-3.3K-G03	SUN-3.6K-G03	SUN-4K-G03
Input Side							
Max. DC Input Power (kW)	2	2.9	3.5	3.9	4.3	4.7	5.2
Max. DC Input Voltage (V)	550						
Start-up DC Input Voltage (V)	80						
MPPT Operating Range (V)	70~500						
Max. DC Input Current (A)	13						
Max. Short Circuit Current (A)	19.5						
No.of MPP Trackers	1						
No.of Strings per MPP Tracker	1						
Output Side							
Rated Output Power (kW)	1.5	2.2	2.7	3	3.3	3.6	4
Max. Active Power (kW)	1.7	2.42	2.97	3.3	3.63	3.96	4.4
Nominal Output Voltage / Range (V)	L/N/PE 220V/230V (Optional)						
Rated Grid Frequency (Hz)	50 / 60 (Optional)						
Operating Phase	Single phase						
Rated AC Grid Output Current (A)	6.5	9.6	11.7	13	14.3	15.7	17.4
Max. AC Output Current (A)	7.2	10.5	12.9	14.3	15.8	17.2	19.1
Output Power Factor	0.8 leading to 0.8 lagging						
Grid Current THD	<3%						
DC Injection Current (mA)	<0.5%						
Grid Frequency Range	47~52 or 57~62 (Optional)						
Efficiency							
Max. Efficiency	97.3%	97.3%	97.3%	97.5%	97.5%	97.5%	97.5%
Euro Efficiency	97.1%	97.1%	97.1%	97.3%	97.3%	97.3%	97.3%
MPPT Efficiency	>99%						
Protection							
DC Reverse-Polarity Protection	Yes						
AC Short Circuit Protection	Yes						
AC Output Overcurrent Protection	Yes						
Output Overvoltage Protection	Yes						
Insulation Resistance Protection	Yes						
Ground Fault Monitoring	Yes						
Anti-islanding Protection	Yes						
Temperature Protection	Yes						
Integrated DC Switch	Optional						
Remote software upload	Yes						
Remote change of operating parameters	Yes						
Surge protection	DC Type II / AC Type II						
General Data							
Size (mm)	280W×272.5H×184D						
Weight (kg)	4.8						
Topology	Transformerless						
Internal Consumption	<1W (Night)						
Running Temperature	-25~65℃, >45℃ derating						
Ingress Protection	IP65						
Noise Emission (Typical)	<25 dB						
Cooling Concept	Natural cooling						
Max. Operating Altitude Without Derating	2000m						
Warranty	8 years						
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11						
Operating Surroundings Humidity	0-100%						
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2						
Features							
DC Connection	MC-4 mateable						
AC Connection	IP65 rated plug						
Display	LCD1602						
Interface	RS485/RS232/Wifi/LAN						

Single Phase String Inverter

SUN- 3.6 / 4.2 / 5.2 / 6.2 K-G03



2 MPP trackers, Max. efficiency up to 97.5%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)



Low start-up voltage of 80V

Deye

Stock Code: 605117.SH

Model	 SUN-3.6K-G03	 SUN-4.2K-G03	SUN-5.2K-G03	SUN-6.2K-G03
Input Side				
Max. DC Input Power (kW)	4.7	5.5	6.5	7.8
Max. DC Input Voltage (V)	550			
Start-up DC Input Voltage (V)	80			
MPPT Operating Range (V)	70~500			
Max. DC Input Current (A)	13+13			
Max. Short Circuit Current (A)	19.5+19.5			
Number of MPPT / Strings per MPPT	2/1			
Output Side				
Rated Output Power (kW)	3.6	4.2	5.2	6.2
Max. Active Power (kW)	3.96	4.62	5.72	6.82
Nominal Output Voltage / Range (V)	L/N/PE 220V/187V-242V, 230V/ 195.5V-253V (Optional)			
Rated Grid Frequency (Hz)	50 / 60 (Optional)			
Operating Phase	Single phase			
Rated AC Grid Output Current (A)	15.7	18.3	22.6	27
Max. AC Output Current (A)	17.2	20.1	24.9	29.7
Output Power Factor	0.8 leading to 0.8 lagging			
Grid Current THD	<3%			
DC Injection Current (mA)	<0.5%			
Grid Frequency Range	47~52 or 57~62 (Optional)			
Efficiency				
Max. Efficiency	97.3%	97.5%	97.5%	97.5%
Euro Efficiency	97.1%	97.3%	97.3%	97.3%
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Optional			
Remote software upload	Yes			
Remote change of operating parameters	Yes			
Surge protection	DC Type II / AC Type II			
General Data				
Size (mm)	330W×323H×190D			
Weight (kg)	7.5			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25~65°C, >45°C derating			
Ingress Protection	IP65			
Noise Emission (Typical)	<25 dB			
Cooling Concept	Natural cooling			
Max. Operating Altitude Without Derating	2000m			
Warranty	8 years			
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
DC Connection	MC-4 mateable			
AC Connection	IP65 rated plug			
Display	LCD1602			
Interface	RS485/RS232/Wifi/LAN			

Three Phase String Inverter

SUN- 6 / 7 / 8 / 9 / 10 / 12 K-G03



2 MPP trackers, Max. efficiency up to 98.3%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-6K-G03	SUN-7K-G03	SUN-8K-G03	SUN-9K-G03	SUN-10K-G03	SUN-12K-G03
Input Side						
Max. DC Input Power (kW)	7.8	9.1	10.4	11.7	13	15.6
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	140					250
MPPT Operating Range (V)	120~850					200~850
Max. DC Input Current (A)	13+13					
Max. Short Circuit Current (A)	19.5+19.5					
Number of MPPT / Strings per MPPT	2/1					
Output Side						
Rated Output Power (kW)	6	7	8	9	10	12
Max. Active Power (kW)	6.6	7.7	8.8	9.9	11	13.2
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	8.7	10.1	11.6	13	14.5	17.4
Max. AC Output Current (A)	9.6	11.2	12.8	14.3	15.9	19.1
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.3%					
Euro Efficiency	97.5%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	330W×457H×185D					330×457×205
Weight (kg)	10					11
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<25 dB					
Cooling Concept	Natural cooling					
Max. Operating Altitude Without Derating	2000m					
Warranty	8 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD1602					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter

SUN- 15 / 17 K-G05



2 MPP trackers, Max. efficiency up to 98.5%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)


Deye

Stock Code: 605117.SH

Model	SUN-15K-G05	SUN-17K-G05
Input Side		
Max. DC Input Power (kW)	19.5	22.1
Max. DC Input Voltage (V)	1000	
Start-up DC Input Voltage (V)	250	
MPPT Operating Range (V)	200~850	
Max. DC Input Current (A)	13+26	
Max. Short Circuit Current (A)	19.5+39	
Number of MPPT / Strings per MPPT	2/1+2	
Output Side		
Rated Output Power (kW)	15	17
Max. Active Power (kW)	16.5	18.7
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V	
Rated Grid Frequency (Hz)	50 / 60 (Optional)	
Operating Phase	Three phase	
Rated AC Grid Output Current (A)	21.7	24.6
Max. AC Output Current (A)	23.9	27.1
Output Power Factor	0.8 leading to 0.8 lagging	
Grid Current THD	<3%	
DC Injection Current (mA)	<0.5%	
Grid Frequency Range	47~52 or 57~62 (Optional)	
Efficiency		
Max. Efficiency	98.5%	
Euro Efficiency	97.5%	
MPPT Efficiency	>99%	
Protection		
DC Reverse-Polarity Protection	Yes	
AC Short Circuit Protection	Yes	
AC Output Overcurrent Protection	Yes	
Output Overvoltage Protection	Yes	
Insulation Resistance Protection	Yes	
Ground Fault Monitoring	Yes	
Anti-islanding Protection	Yes	
Temperature Protection	Yes	
Integrated DC Switch	Yes	
Remote software upload	Yes	
Remote change of operating parameters	Yes	
Surge protection	DC Type II / AC Type II	
General Data		
Size (mm)	333W×472H×202D	
Weight (kg)	15	
Topology	Transformerless	
Internal Consumption	<1W (Night)	
Running Temperature	-25~65°C, >45°C derating	
Ingress Protection	IP65	
Noise Emission (Typical)	<40 dB	
Cooling Concept	Smart cooling	
Max. Operating Altitude Without Derating	2000m	
Designed Lifetime	>20 years	
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11	
Operating Surroundings Humidity	0-100%	
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2	
Features		
DC Connection	MC-4 mateable	
AC Connection	IP65 rated plug	
Display	LCD1602	
Interface	RS485/RS232/Wifi/LAN	

Three Phase String Inverter

SUN-18/20/25K-G05

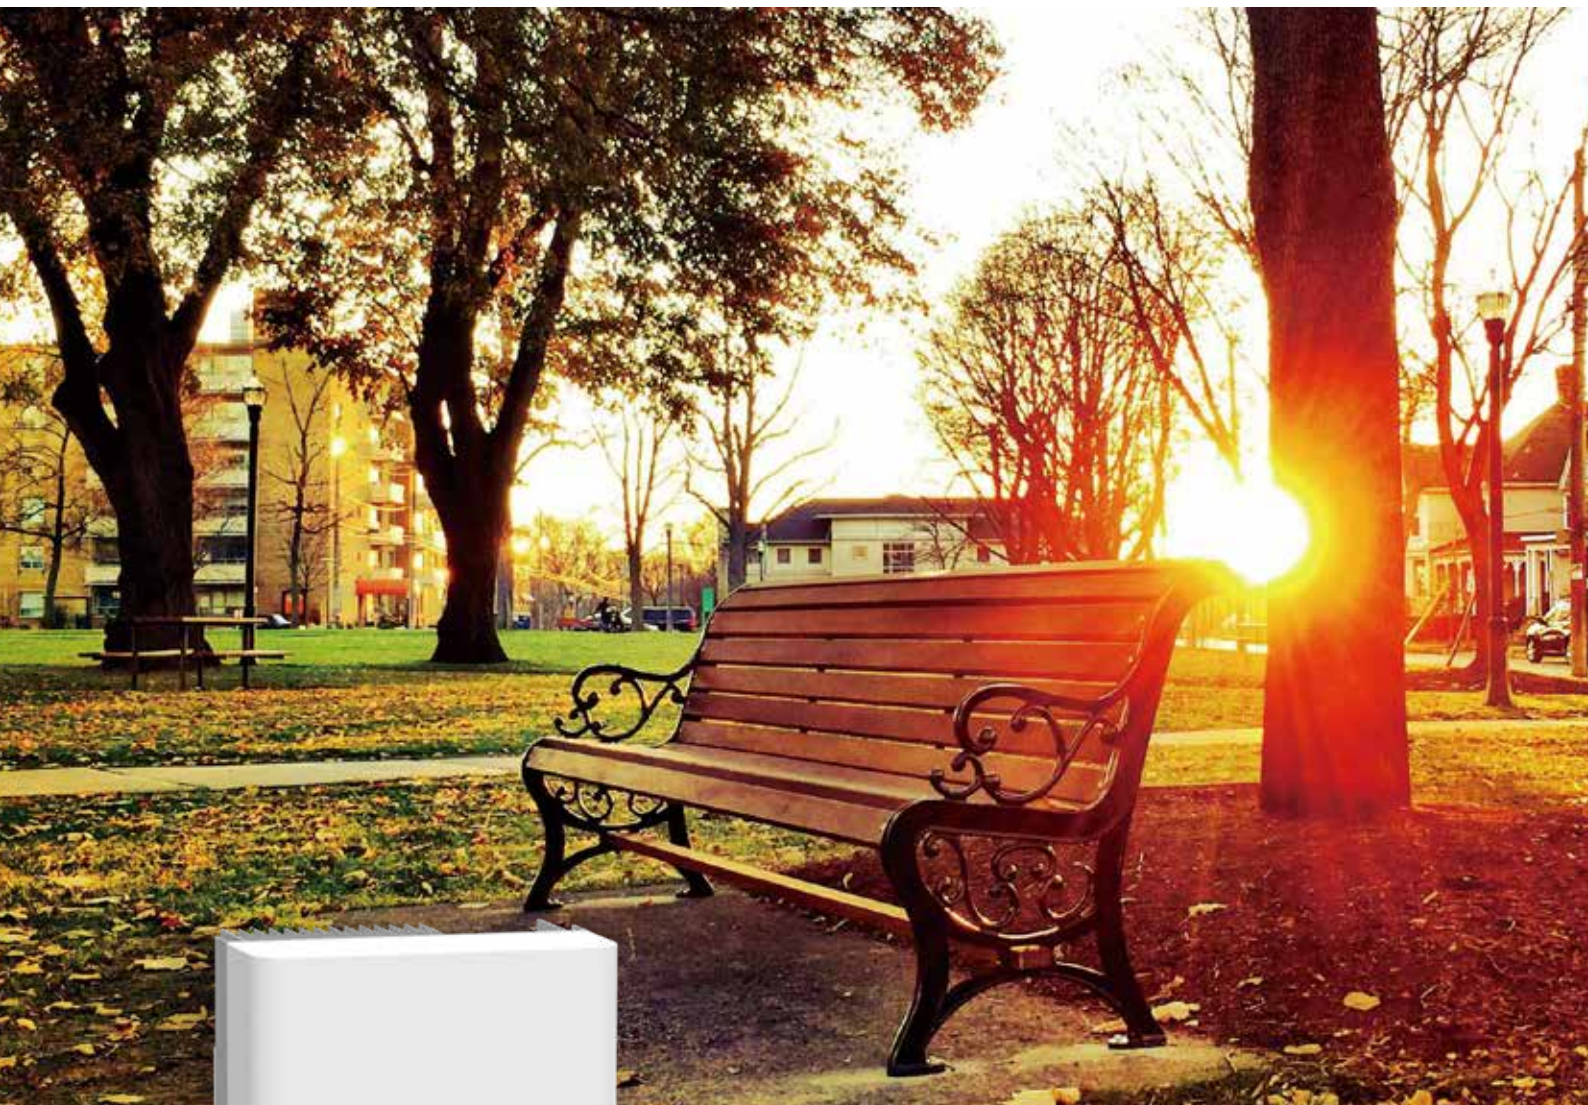

2 MPP trackers, Max. efficiency up to 98.6%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-18K-G05	SUN-20K-G05	SUN-25K-G05
Input Side			
Max. DC Input Power (kW)	23.4	26	32.5
Max. DC Input Voltage (V)	1000		
Start-up DC Input Voltage (V)	250		
MPPT Operating Range (V)	200~850		
Max. DC Input Current (A)	26+26		
Max. Short Circuit Current (A)	39+39		
No.of MPP Trackers	2		
No.of Strings per MPP Tracker	2		
Output Side			
Rated Output Power (kW)	18	20	25
Max. Active Power (kW)	19.8	22	27.5
Nominal Output Voltage / Range (V)	3L/N/PE 220/380V, 230/400V		
Rated Grid Frequency (Hz)	50 / 60 (Optional)		
Operating Phase	Three phase		
Rated AC Grid Output Current (A)	27.3/26.1	30.3/29	37.9/36.2
Max. AC Output Current (A)	30/28.7	33.3/31.9	41.7/39.8
Output Power Factor	0.8 leading to 0.8 lagging		
Grid Current THD	<3%		
DC Injection Current (mA)	<0.5%		
Grid Frequency Range	47~52 or 57~62 (Optional)		
Efficiency			
Max. Efficiency	98.6%		
Euro Efficiency	97.8%		
MPPT Efficiency	>99%		
Protection			
DC Reverse-Polarity Protection	Yes		
AC Short Circuit Protection	Yes		
AC Output Overcurrent Protection	Yes		
Output Overvoltage Protection	Yes		
Insulation Resistance Protection	Yes		
Ground Fault Monitoring	Yes		
Anti-islanding Protection	Yes		
Temperature Protection	Yes		
Integrated DC Switch	Yes		
Remote software upload	Yes		
Remote change of operating parameters	Yes		
Surge protection	DC Type II / AC Type II		
General Data			
Size (mm)	362W×527H×220D		
Weight (kg)	20		
Topology	Transformerless		
Internal Consumption	<1W (Night)		
Running Temperature	-25~65°C, >45°C derating		
Ingress Protection	IP65		
Noise Emission (Typical)	<40 dB		
Cooling Concept	Smart cooling		
Max. Operating Altitude Without Derating	2000m		
Warranty	5 years		
Grid Connection Standard	VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150		
Operating Surroundings Humidity	0-100%		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
Features			
DC Connection	MC-4 mateable		
AC Connection	IP65 rated plug		
Display	LCD1602		
Interface	RS485/RS232/Wifi/LAN		

Three Phase String Inverter

SUN- 30 / 33 / 35 / 40 / 50 / 60 K-G03



Max. 4 MPP trackers, Max. efficiency up to 98.7%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-30K-G03	SUN-33K-G03	SUN-35K-G03	SUN-40K-G03	SUN-50K-G03	SUN-60K-G03
Input Side						
Max. DC Input Power (kW)	39	42.9	45.5	52	65	78
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200~850					
Max. DC Input Current (A)	40+40	40+40+40			40+40+40+40	
Max. Short Circuit Current (A)	60+60	60+60+60			60+60+60+60	
Number of MPPT / Strings per MPPT	2/3	3/3			4/3	
Output Side						
Rated Output Power (kW)	30	33	35	40	50	60
Max. Active Power (kW)	33	36.3	38.5	44	55	66
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	43.5	47.8	50.7	58	72.4	87
Max. AC Output Current (A)	47.9	52.6	55.8	63.8	79.7	95.7
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.7%					
Euro Efficiency	98%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	647.5W×537H×303.5D					
Weight (kg)	44.5					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65℃, >45℃ derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<45 dB					
Cooling Concept	Smart cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD 240 × 160					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter

SUN- 70 / 75 / 80 / 90 / 100 / 110 K-G03



Max. 6 MPP trackers, Max. efficiency up to 98.7%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)



Type II DC/AC SPD

Deye

Stock Code: 605117.SH

Model	SUN-70K-G03	SUN-75K-G03	SUN-80K-G03	SUN-90K-G03	SUN-100K-G03	SUN-110K-G03
Input Side						
Max. DC Input Power (kW)	91	97.5	104	135	150	150
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200~850					
Max. DC Input Current (A)	40+40+40+40			40+40+40+40+40+40		
Max. Short Circuit Current (A)	60+60+60+60			60+60+60+60+60+60		
Number of MPPT / Strings per MPPT	4/4			6/4		
Output Side						
Rated Output Power (kW)	70	75	80	90	100	110
Max. Active Power (kW)	77	82.5	88	99	110	121
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	101.5	108.7	115.9	130.4	144.9	159.4
Max. AC Output Current (A)	111.6	119.6	127.5	143.5	159.4	175.4
Output Power Factor	>0.99					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.7%					
Euro Efficiency	98.3%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	838W×568H×323D					
Weight (kg)	73.7					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65℃, >45℃ derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<55 dB					
Cooling Concept	Smart cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD 240 × 160					
Interface	RS485/RS232/Wifi/LAN					